


BCS-TIP5801IR-V-E-Ai

Kamera IP tubowa 8Mpx z obiektywem motozoom 2.7~13.5mm



- Przetwornik 1/2.8" 8Mpx PS CMOS
- Technologia Starlight
- Kodowanie H.265+/H.264+/MJPEG
- Obsługa trzech strumieni kodowania
- Obiektyw motozoom 2.7~13.5mm F1.5
- Mechaniczny filtr podczerwieni ICR
- Wbudowany web serwis, zgodność z BCS-NVR, CMS(BCS Manager), aplikacja mobilna BCS(iOS, android), P2P, Onvif
- Funkcje AWB, AES, AGC, BLC, HLC, WDR(120dB), Ultra DNR, Defog, ROI
- Funkcje inteligentne: przekroczenie linii, wtargnięcie w obszar
- Promiennik podczerwieni do 60m
- 1 wejście i 1 wyjście audio
- 1 wejście i 1 wyjście alarmowe
- Obudowa zewnętrzna metalowa IP67
- Temperatura pracy -30°C ~ +60°C
- Obsługa karty microSD do 256GB
- Zasilanie DC12V, PoE(802.3af)

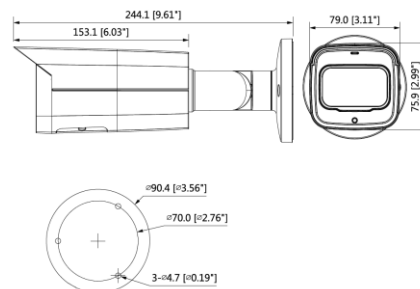

BCS-TIP5801IR-V-E-Ai

Kamera IP tubowa 8Mpx z obiektywem motozoom 2.7~13.5mm

System wideo	IP
System skanowania	Progressive Scan
Przetwornik	1/2.8" 8Mpx CMOS
RAM/ROM	512MB/128MB
Ilość pikseli	3840(H) × 2160(V)
Czułość	0.007Lux/F1.5(Kolor) 0Lux/F1.5(IR wł.)
Stosunek S/N	>56dB
Obiektyw	Motozoom 2.7~13.5mm
Kąt widzenia	H: 113°~31° V: 58°~17°
DORI	W: Detect 85m/ Observe 34m/ Recognize 17m/ Identify 8m T: Detect 280m/ Observe 112m/ Recognize 56m/ Identify 28m
Balans bieli	(AWB) Auto/ręcznie
Kompensacja tła	BLC/HLC/WDR(120dB)
Migawka	1/3~1/100000s
Kontrola wzmocnienia	(AGC) Auto/ręcznie
Redukcja szumów	Ultra 2D/3D DNR
Detekcja ruchu	4 obszary
Maska prywatności	4 obszary
Obrót obrazu	Mirror, Flip 0°/90°/180°/270°
Wyostrażanie	Auto/ręcznie
Dzień/noc	Mechaniczny filtr IR (ICR)
IR	Zasięg 60m
Kompresja wideo	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Strumień główny	3840×2160@20fps (30fps jeżeli wyłączone funkcje Ai)
Strumień drugi	704×576@25fps / 704×480@30fps
Strumień trzeci	1920×1080@30fps
Bitrate	H.264: 3Kbps~8192Kbps, H.265: 3Kbps~8192Kbps
Podłączenie sieci	RJ-45 (10/100Mbps)
Protokoły	IPv4; IPv6; HTTP; HTTPS; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; PPPoE; 802.1x; SNMP
Audio	1 wejście / 1 wyjście
Kodowanie audio	G.711a/ G.711Mu/ AAC/ G.726
Alarm	1 wejście 5mA 3~5VDC / 1 wyjście 300mA 12VDC
Zgodność	ONVIF(Profil S/Profil G)
Użytkownicy	Maksymalnie 20 zalogowanych
Użytkownicy mobilni	iOS, android
Gniazdo kart pamięci	microSD do 256GB
Zasilanie	DC12V(±30%), PoE(802.3af), Pobór mocy <10.7W
Warunki pracy	-30°C ~+60°C / 10~95%RH
Obudowa	Zewnętrzna metalowa IP67
Wymiary i waga	244.1 mm × 79.0 mm × 75.9 mm 0.8kg



BCS-TIP5801IR-V-E-Ai

Kamera IP tubowa 8Mpx z obiektywem motozoom 2.7~13.5mm

Adapter
BCS-AT5V



Adapter
BCS-AT135



Adapter
BCS-AT356




BCS-TIP5801IR-V-E-Ai

Network bullet camera 8Mpx with motozoom lens 2.7~13.5mm



- Sensor 1/2.8" 8Mpx PS CMOS
- Starlight technology
- Compression H.265+/H.264+/MJPEG
- Triple stream coding
- Motozoom lens 2.7~13.5mm F1.5
- IR cut filter with auto-switch ICR
- Built-in web-service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(iOS, android), P2P, Onvif
- Functions AWB, AES, AGC, BLC, HLC, WDR(120dB), Ultra DNR, Defog, ROI
- Intelligent functions: crossline, intrusion
- IR range up to 60m
- 1 audio in / 1 audio out
- 1 alarm in / 1 alarm out
- Outside metal casing with protection IP67
- Working environment -30°C ~ +60°C
- Edge storage microSD up to 256GB
- Power supply DC12V, PoE(802.3af)

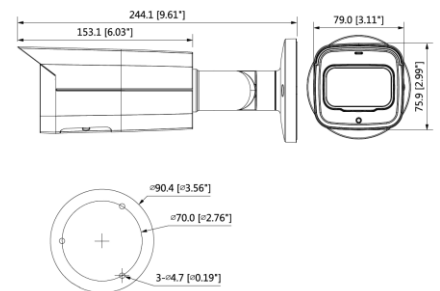

BCS-TIP5801IR-V-E-Ai

Network bullet camera 8Mpx with motozoom lens 2.7~13.5mm

Video system	IP
Scanning system	Progressive Scan
Sensor	1/2.8" 8Mpx CMOS
RAM/ROM	512MB/128MB
Pixels	3840(H) × 2160(V)
Minimum illumination	0.007Lux/F1.5(Color) 0Lux/F1.5(IR On)
S/N ratio	>56dB
Lens	Motozoom 2.7~13.5mm
Angle of view	H: 113°-31° V: 58°-17°
DORI	W: Detect 85m/ Observe 34m/ Recognize 17m/ Identify 8m T: Detect 280m/ Observe 112m/ Recognize 56m/ Identify 28m
White balance	(AWB) Auto/manual
Backlight compensation	BLC/HLC/WDR(120dB)
Shutter	1/3~1/100000s
Gain control	(AGC) Auto/manual
Noise reduction	Ultra 2D/3D DNR
Motion detect	4 areas
Privacy masking	4 areas
Image rotate	Mirror, Flip 0°/90°/180°/270°
Focus	Auto/manual
Day/night	IR cut filter with auto-switch (ICR)
IR	Range 60m
Video compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Main stream	3840×2160@20fps (30fps with Ai functions disabled)
Second stream	704×576@25fps / 704×480@30fps
Third stream	1920×1080@30fps
Bitrate	H.264: 3Kbps~8192Kbps, H.265: 3Kbps~8192Kbps
Network	RJ-45 (10/100Mbps)
Protocols	IPv4; IPv6; HTTP; HTTPS; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; PPPoE; 802.1x; SNMP
Audio	1 in / 1 out
Audio compression	G.711a/ G.711Mu/ AAC/ G.726
Alarm	1 in 5mA 3~5VDC / 1 out 300mA 12VDC
Compatibility	ONVIF(Profile S/Profile G)
Users	Max 20 logged in
Mobile users	iOS, android
Edge storage	microSD up to 256GB
Power supply	DC12V(±30%), PoE(802.3af), Power consumption <10.7W
Working environment	-30°C ~+60°C / 10~95%RH
Casing	Outside metal casing with protection IP67
Dimensions and weight	244.1 mm × 79.0 mm × 75.9 mm 0.8kg



BCS-TIP5801IR-V-E-Ai

Network bullet camera 8Mpx with motozoom lens 2.7~13.5mm

Junction box
BCS-AT5V



Junction box
BCS-AT135



Junction box
BCS-AT356

